

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 18 TOWNSHIP 17 RANGE 5

DATE: 6-8-02

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Brass plug in steel box



METHOD OF ESTABLISHMENT: County: 7-8-97

IN. S.P.C. E ZONE NAD '83

NAME: 17051802

N: 519475.6770(m)

E: 71121.1500(m)

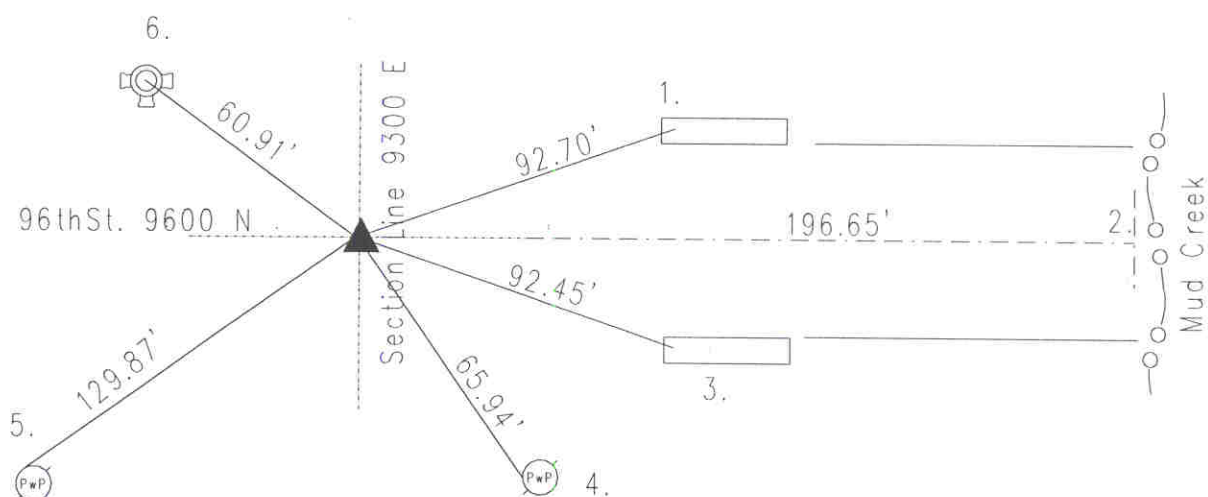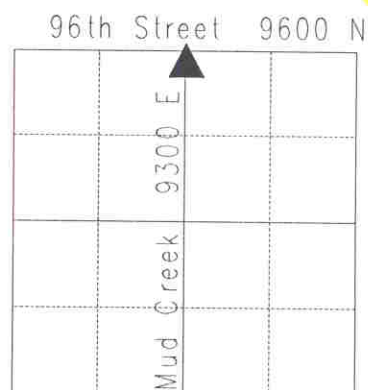

Original post set 1821 by Laughlin with witnesses: 20" sugar maple N 78 E 22 links;

20" sugar maple S 78 W 23 links. Legal by Wilson 8-1854 per Lawrence Township

Legal Survey Book pg. 8 called corner 'G' ; also called stone. Survey does not

indicate whether stone was set or found. 5-16-75 Cripe called stone found but

no cut 'x' 2' 6" down. Railroad spike set over high point of stone. 5-21-75

Fortner merely re-tied corner. 7-7-79 Bruer called railroad spike over stone

30" down. Excavated by Cleveland 5-5-82. 3'x3' hole dug. 30" down. Stone found

30" below railroad spike at surface. Harrison set. 'Called Quarter- Corner set over

stone. Upon completion of bridge Harrison re-set. Re-tied 7-8-97 by Wilcoxon.

Re-tied 6-8-02 by Wilcoxon.

17051802

REF.	DISTANCE	DESCRIPTION
1.	92.70'	Cut 'x' in aluminum guard rail
2.	196.65'	Due E to line between (asphalt pavem't and W-edge of conc.bridge
3.	92.45'	Cut 'x' in aluminum guard rail
4.	65.94'	PK nail W PwP#52-181 AB 96" up
5.	129.87'	PK nail NW PwP#51-181 AB 96" up
6.	60.91'	Top nut of fire hydrant